

# DBE SERIES


**B** **VERSION**  
Solid Male Shaft  
**MALE SHAFT**  
**DIA.** 24mm  
**KEY** 8.0mm



**APPLICATIONS.** Consult us for more



## COMPONENTS

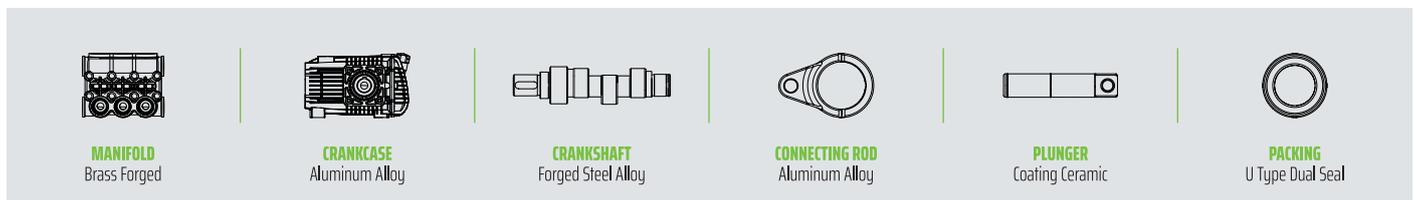

## TECHNICAL DATA

<b>Manifold:</b>	Brass forged	<b>Head Port:</b>	Inlet 3/4", Outlet 3/8"
<b>Crankcase:</b>	Die-cast aluminum alloy, anodized	<b>Unloader:</b>	Banjo bolt, trap type
<b>Connecting Rod:</b>	One piece aluminum alloy	<b>Unloader Port:</b>	Outlet M22, Bypass 1/2"
<b>Plunger:</b>	Ceramic coating, precision grinded.	<b>Oil Bath Capacity:</b>	550ml (half level of oil gauge),
<b>Packing:</b>	U type, high-low dual pressure packing	<b>Oil Type:</b>	15W/40 Non-Detergent
<b>Bearing:</b>	Ball and needle bearing	<b>Water Inlet Pressure:</b>	0-50psi/3.5bar
<b>Crankshaft:</b>	Forged steel alloy, heat treatment, multiple process grinded	<b>Max Inlet Water Temp.</b>	≤ 50°C/122°F

MODEL	MAX FLOW		MAX PRESSURE		POWER INPUT	POWER SPEED	WEIGHT	SHIPPING SIZE
	GPM	LPM	PSI	BAR	KW	RPM	KG	CM
DBE-2218B	7.6	29	1740	120	7.5	1450	10	34.5x30x22
DBE-2518B	10	38	1450	100	7.5	1450	10	34.5x30x22

## OVERALL DIMENSION

