

DBQ SERIES


A5 VERSION
 Engine Direct Drive
HOLLOW SHAFT
1in 25.4mm
KEY 6.35mm



APPLICATIONS. Consult us for more



COMPONENTS

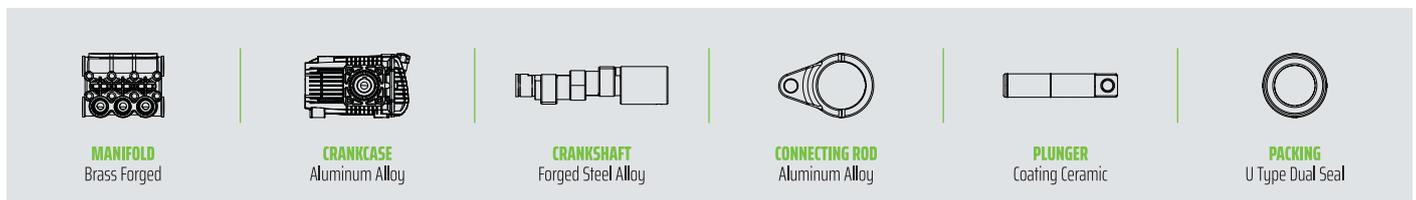

TECHNICAL DATA

Manifold:	Brass forged	Head Port:	Inlet 3/8", Outlet 1/2"
Crankcase:	Die-cast aluminum alloy, anodized	Unloader:	Banjo bolt, trap type
Connecting Rod:	One piece aluminum alloy	Unloader Port:	Inlet 3/4" (BSP or NH), Outlet 3/8" Quick Connect
Plunger:	Ceramic coating, precision grinded.	Oil Bath Capacity:	550ml (half level of oil gauge),
Packing:	U type, high-low dual pressure packing	Oil Type:	15W/40 Non-Detergent
Bearing:	Dual tapered roller bearing	Water Inlet Pressure:	0-50psi/3.5bar
Crankshaft:	Forged steel alloy, heat treatment, multiple process grinded	Max Inlet Water Temp.	≤ 50°C/122°F

MODEL	MAX FLOW		MAX PRESSURE		POWER INPUT	POWER SPEED	WEIGHT	SHIPPING SIZE
	GPM	LPM	PSI	BAR				
DBQ-1807A5	4.7	18	3600	248	13	3400	10.3	32x28.5x26
DBQ-2007A5	5.8	22	2900	200	13	3400	10.3	32x28.5x26
DBQ-2207A5	7.1	27	2400	166	13	3400	10.3	32x28.5x26
DBQ-22085A5	8.4	32	2000	138	13	3400	10.3	32x28.5x26

OVERALL DIMENSION

