

DBQ SERIES


A **VERSION**
 Engine Direct Drive
HOLLOW SHAFT
 3/4in 19.05mm
KEY 4.78mm



APPLICATIONS. Consult us for more



COMPONENTS

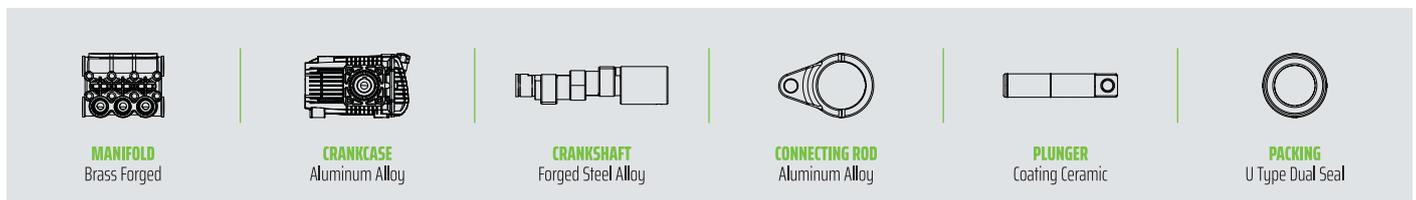

TECHNICAL DATA

Manifold:	Brass forged	Head Port:	Inlet 3/8", Outlet 1/2"
Crankcase:	Die-cast aluminum alloy, anodized	Unloader:	Banjo bolt, trap type
Connecting Rod:	One piece aluminum alloy	Unloader Port:	Inlet 3/4" (BSP or NH), Outlet 3/8" Quick Connect
Plunger:	Ceramic coating, precision grinded.	Oil Bath Capacity:	550ml (half level of oil gauge),
Packing:	U type, high-low dual pressure packing	Oil Type:	15W/40 Non-Detergent
Bearing:	Dual tapered roller bearing	Water Inlet Pressure:	0-50psi/3.5bar
Crankshaft:	Forged steel alloy, heat treatment, multiple process grinded	Max Inlet Water Temp.	≤ 50°C/122°F

MODEL	MAX FLOW		MAX PRESSURE		POWER INPUT	POWER SPEED	WEIGHT	SHIPPING SIZE
	GPM	LPM	PSI	BAR	HP	RPM	KG	CM
DBQ-18085A	5.8	22	1500	103	7	3400	10	32x28.5x26
DBQ-20085A	7.1	27	1200	83	7	3400	10	32x28.5x26
DBQ-22085A	8.4	32	1000	70	7	3400	10	32x28.5x26

OVERALL DIMENSION

